

Quick Start Guide


Thank you for purchasing Atlas Adult – the ALS Simulator

Connecting Atlas Adult with REALITi 360: A Simple Guide


Scenario 1: Your existing Wi-Fi router is called iSimulate-5.0

1. **Power Up:** Start by turning on your iSimulate-5.0 router.
2. **Wi-Fi Connection:** Ensure both the REALITi Monitor iPad and the Control iPad are connected to the iSimulate-5.0 network.



WiFi Name: iSimulate-5.0
Password: iSimulate2012

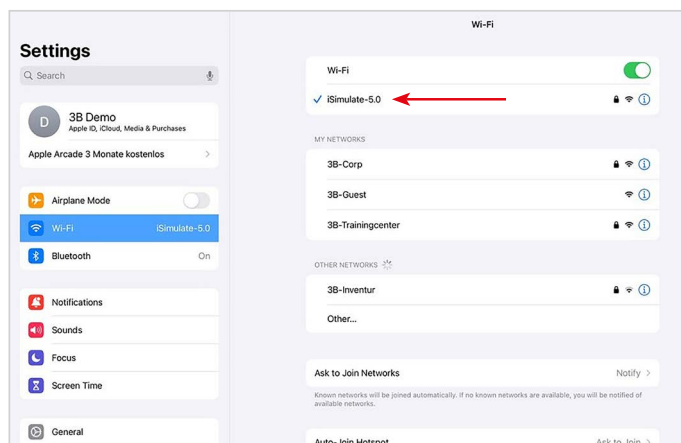



3. **Turn On Atlas Adult:** Locate and press the power button on the right side of the manikin, which will automatically join the iSimulate-5.0 network.

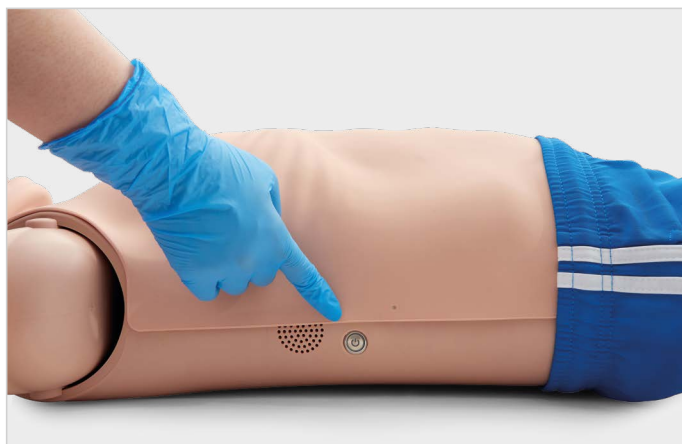

4. **Bluetooth Settings:** Disable Bluetooth on the Monitor iPad, but enable it on the Control iPad to pair with Atlas Adult's Bluetooth.

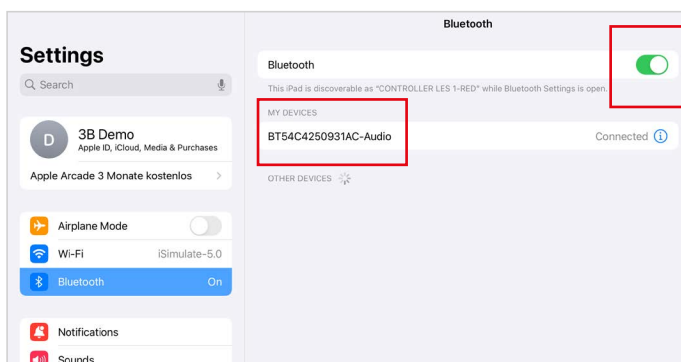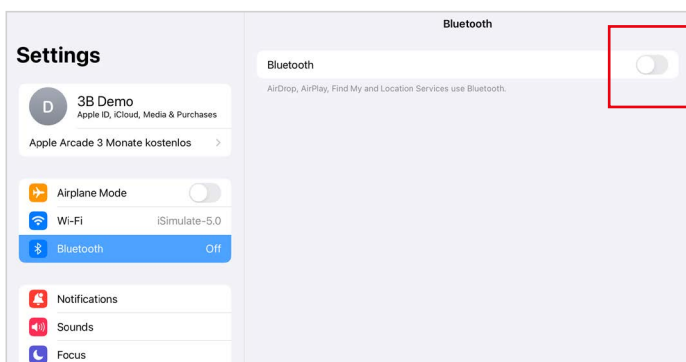


5. **Launch REALTi App:** Open the REALTi app on both iPads, selecting 'Staging' on the Monitor and 'Control' on the Control iPad.

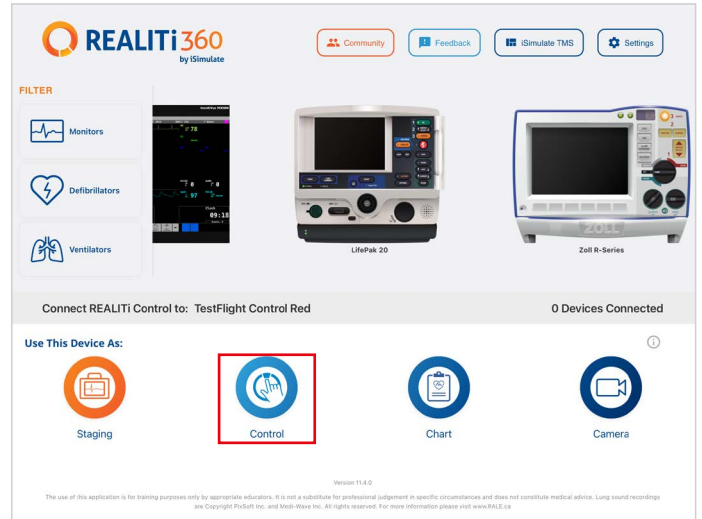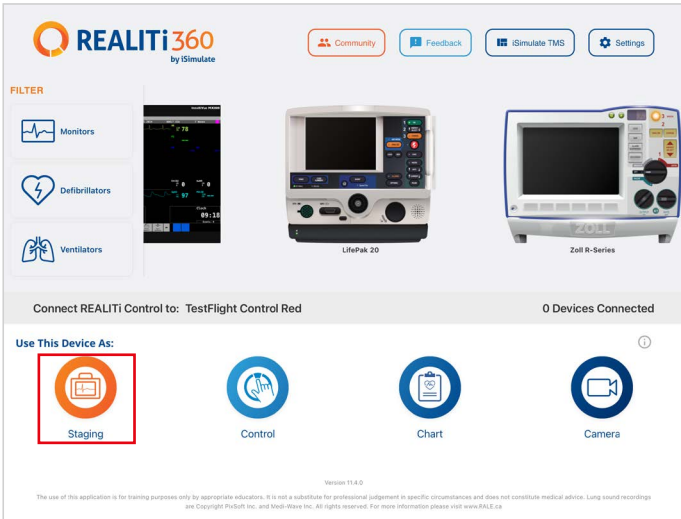


6. **Connect iPads:** Use the 'Tap to Connect' feature on the Control iPad to link both devices.


If the Monitor iPad does not appear in the list, check that the Staging iPad and the Monitor iPad are both connected to the Wi-Fi network of your REALTi router: iSimulate-5.0 (both iPads must be on the same Wi-Fi network).

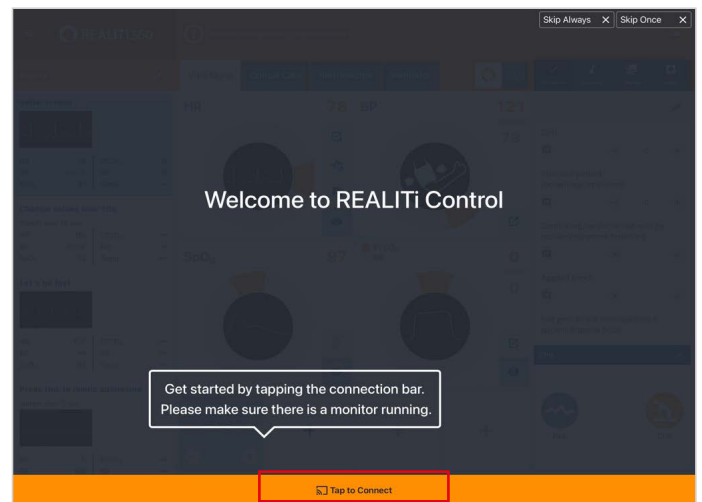


7. **Choose and Start a Scenario:** From the Control iPad, select a scenario or monitor setup to begin.

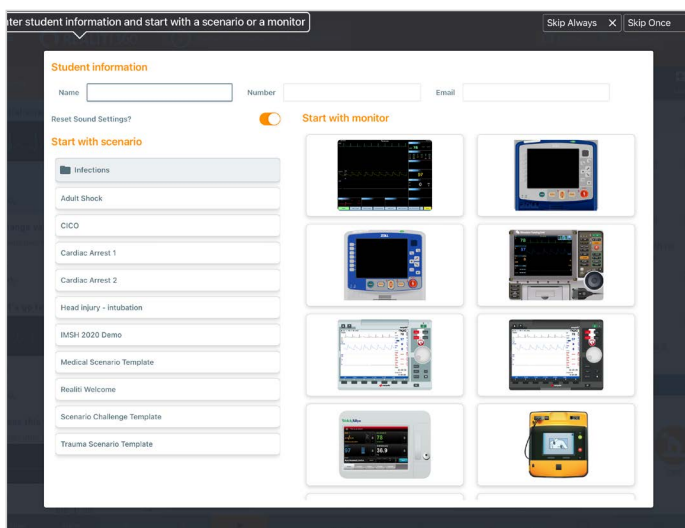


8. Select a scenario or monitor and tap the 'Start' button. Launch the Defibrillator from the main menu on the iPad:

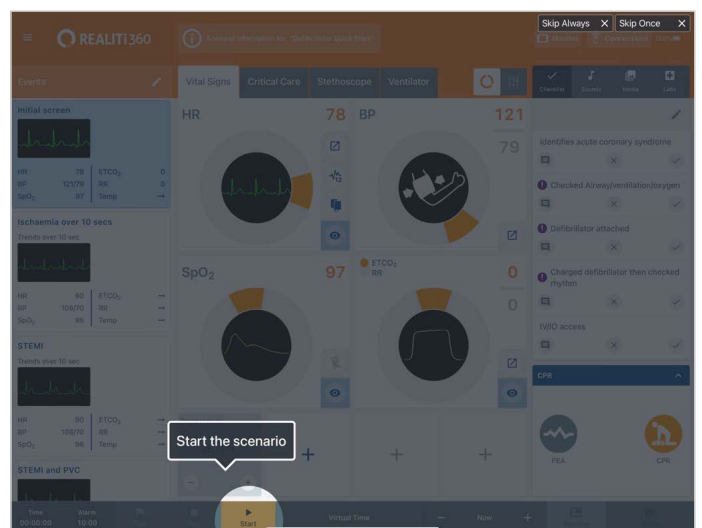


9. On the Monitor iPad, the scenario or monitor selected from step 7 should appear. Start the defibrillator.

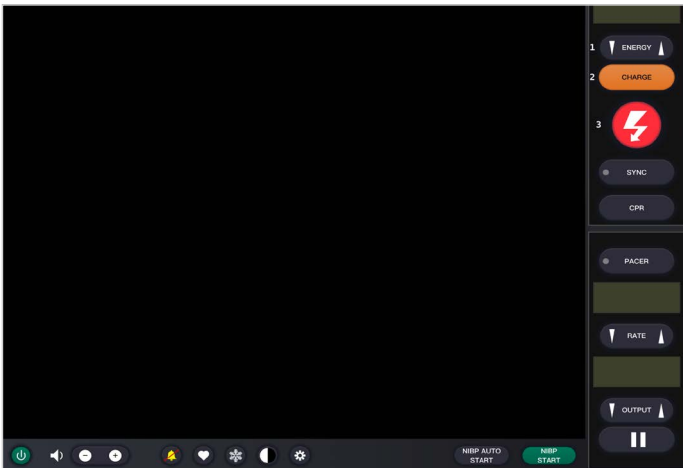

10. Scan for Atlas Adult: Swipe in from the right screen edge of the Monitor iPad to show the 'Available Devices'.

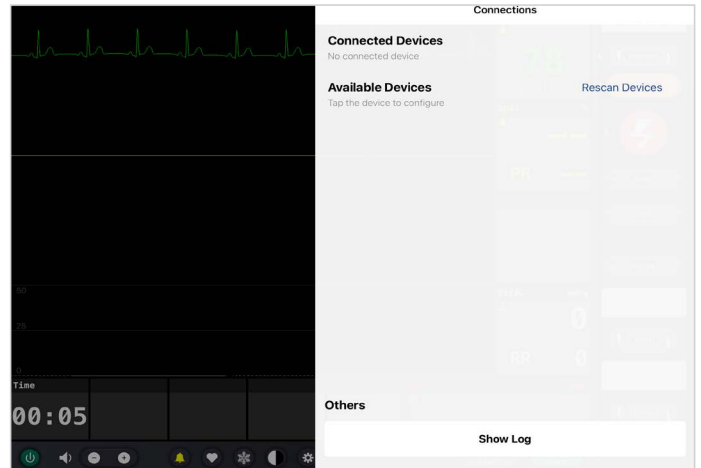

11. Tap 'Rescan Devices'. From the available devices select 'Atlas Adult' by tapping 'Connect Device'. The connected Atlas Adult will be calibrated automatically. The manikins will simulate a carotid pulse.

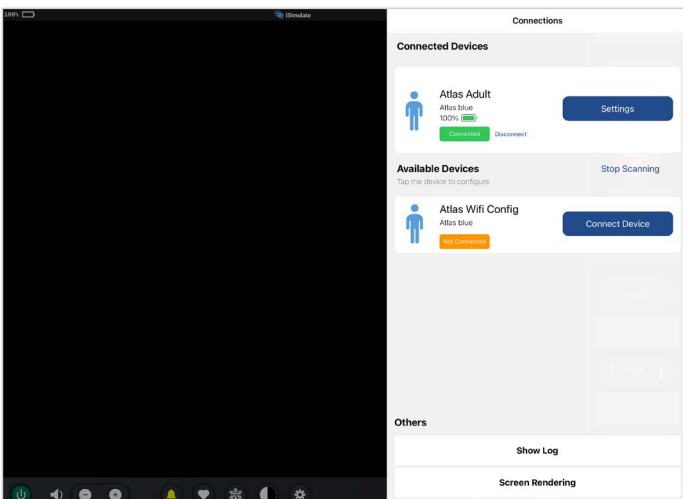


12. Commence Simulation: Compress the manikin. You will be able to see the CPR compression in the ECG waveform and the bar graph.



Scenario 2: Your existing Wi-Fi router is not called iSimulate-5.0


1. Bluetooth Settings: On the Monitor iPad, switch on the Bluetooth and connect to Atlas Adult.

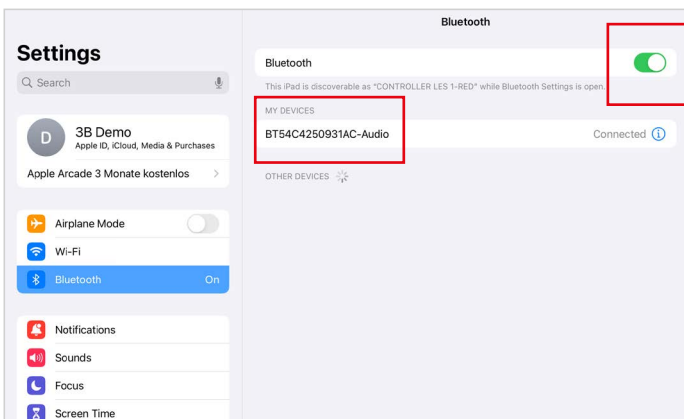


2. Launch REALTi App: On the Monitor iPad start the REALTi app and select the 'Staging' button:




3. **Scan for Atlas Adult:** Swipe in from the right edge of the Monitor iPad's to reveal the 'Available Devices' menu. Select 'Rescan Devices' and choose 'Atlas Wifi Config' from the list by tapping 'Connect Device'

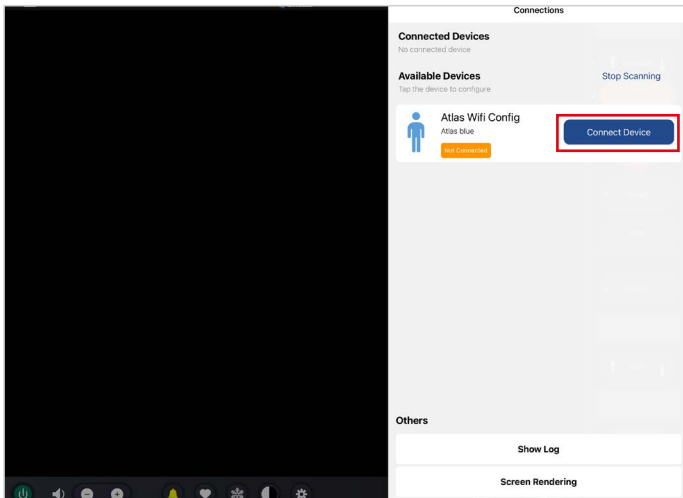


4. Upon successfully connecting to 'Atlas Wifi Config', access the 'Settings'.

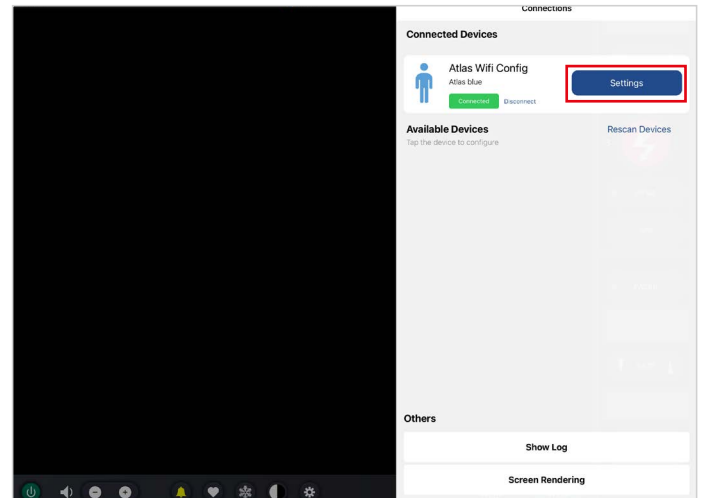

5. **Rename Wi-Fi SSID:** The Atlas Wi-Fi settings will show up, allowing you to customize the Wi-Fi network name to match your router. Ensure that both the Wi-Fi SSID (name) and password align with your Wi-Fi router.

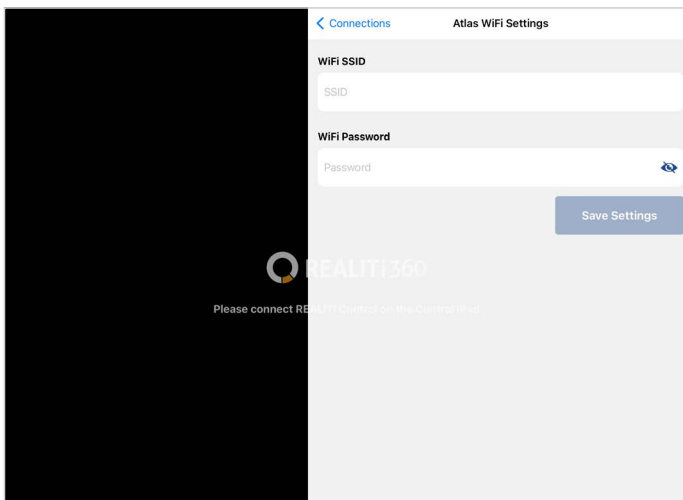

6. After entering the desired Wi-Fi SSID and password, tap 'Save Settings' to apply the changes successfully to the Wi-Fi configuration.

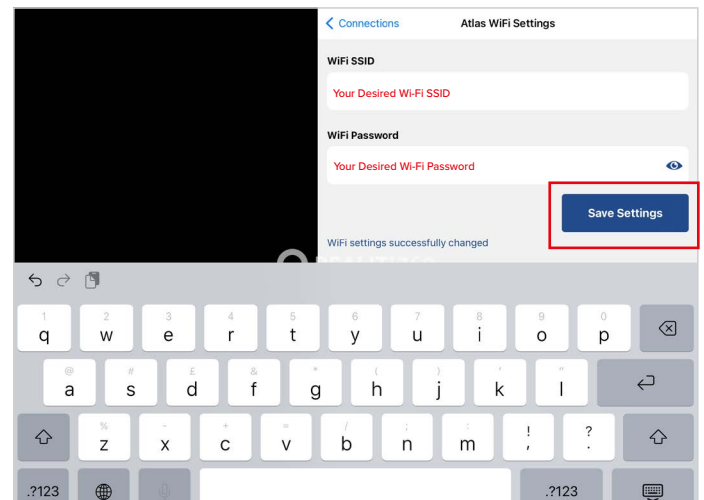


7. Exit the app by double tapping the home button and swipe the app's preview card upward to close.

8. Turn off Atlas Adult.


9. Connect the Monitor iPad and the Staging iPad to the Wi-Fi network of your router. Both iPads must be on the same Wi-Fi network.

10. Follow step 3 to step 12 from scenario 1.

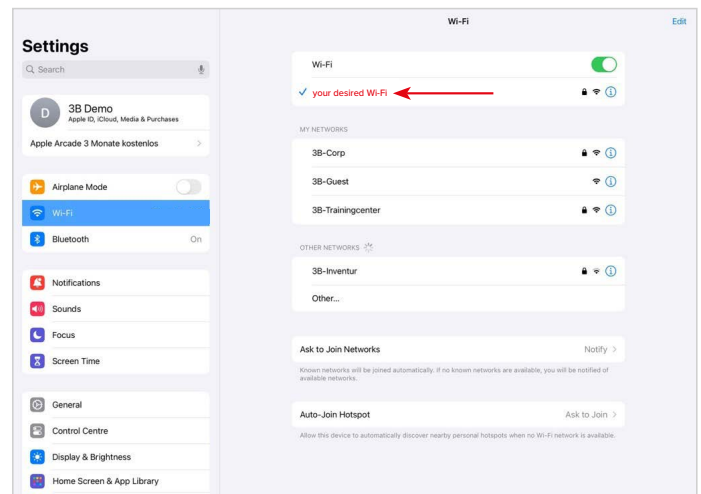

*Scan the barcode on the Smarter Simulation label to register your Atlas Adult and access the product manual, spare parts and consumables information, product videos, and more.

*Please keep the label safe for any after-sales service.

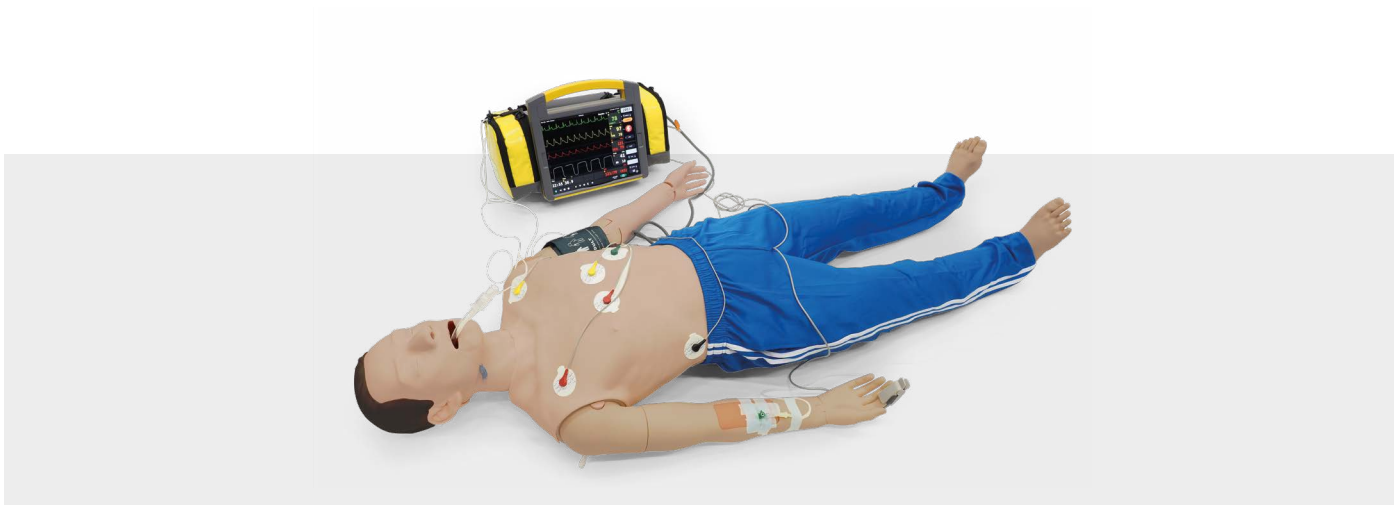

 **Atlas Adult is ready to start!**

01/2026

IF YOU HAVE ANY QUESTIONS OR NEED SUPPORT, PLEASE SCAN HERE



3B Scientific Group

Headquarters · Ludwig-Erhard-Strasse 20 · 20459 Hamburg · Germany · 3bscientific.com